

# Four Wire Braid High Pressure Multi Spiral Hydraulic Hose

## HOSE CONSTRUCTION

Tube: oil resistant synthetic rubber  
 Reinforcement: four high tensile steel wire spiral layers  
 Cover: abrasion, ozone and weather resistant synthetic rubber  
 Temperature range (medium): -40°C to +121°C





20m Roll of  
1/2" EN 856 4SP



## Four Braid of High-Tensile Steel Wire Multi Spiral Hydraulic Hose EN 856 4SP

Hose Size		Inside	Wire	Outside	Working Pressure		Test Pressure		Burst Pressure		Bend Radius	Weight	Price Inc. GST	Price Inc. GST
mm	Inch	mm	mm	mm	bar	psi	bar	psi	bar	psi	mm	kg/m	Per Metre	Per 20m Roll
12	1/2"	12.7	20.2	24.6	425	6165	1020	14790	1700	24650	230	0.93	\$55 inc.	\$990 inc.
19	3/4"	19	28.2	32.2	350	5075	840	12180	1400	20300	300	1.48	\$66 inc.	\$1188 inc.
25	1"	25.4	35.3	39.7	280	4060	670	9715	1120	16240	340	2.02	\$77 inc.	\$1386 inc.
31	1-1/4"	31.8	46	50.8	210	3045	500	7250	840	12180	460	3.05	\$110 inc.	\$1980 inc.

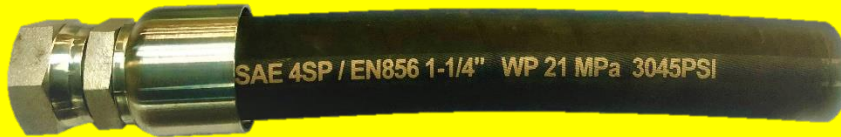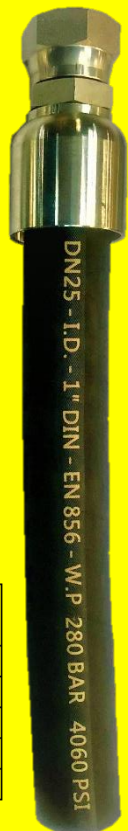

Ring Charles for more information on 0418 641 566

## Four Braid of High-Tensile Steel Wire Multi Spiral Hydraulic Hose EN 856 4SH

Hose Size		Inside	Wire	Outside	Working Pressure		Test Pressure		Burst Pressure		Bend Radius	Weight	Price Inc. GST	Price Inc. GST
mm	Inch	mm	mm	mm	bar	psi	bar	psi	bar	psi	mm	kg/m	Per Metre	Per 20m Roll
19	3/4"	19	28.4	32.2	420	6090	1000	14500	1680	24360	280	1.53	\$77 inc.	\$1386 inc.
25	1"	25.4	35.2	38.7	380	5510	910	13195	1520	22040	340	2.06	\$88 inc.	\$1584 inc.

## HOSE CONSTRUCTION

Tube: oil resistant synthetic rubber  
 Reinforcement: four high tensile steel wire spiral layers  
 Cover: abrasion, ozone and weather resistant synthetic rubber  
 Temperature range (medium): -40°C to +121°C



20m Roll of  
3/4" EN 656 4SH



**Catford Engineering Pty Ltd**

Charles Ph: 0418 641 566  
 Web: [www.catford.com.au](http://www.catford.com.au)  
 Email: [Sales@catford.com.au](mailto:Sales@catford.com.au)

We have crimp fittings to suit these hoses.  
 (Prices & sizes are in the Crimp Fitting Book)  
 Cutting Charge is \$7.70 per cut.



20m Roll of  
1" EN 856 4SH